

HONE 501 E Electric Modules



- ~ All Black
- ~ PERC High Efficiency
- ~ Lower Running Temp
- ~ Premium Performance
- ~ Daylight Optimised

Produce FREE electricity for your building with HONE Electric modules. Built with advanced PERC (Passivated Emitter Rear Cell Technology), the benefits of HONE 's higher efficiency versus standard PV cells can be seen in LIVE data analysis. There is no limit to the size of system you can install in a domestic or commercial installation by using HONE advanced inverter and storage solutions. HONE modules come as a complete package from design, mounting and inverters.

JET BLACK

200 WATT

PERC TECHNOLOGY

STRONG & DURABLE


25 YEAR HONE WARRANTY



Electric Specifications


Model	HONE 501 Electric
Maximum Power (Pmax)	200Wp (0/+3%)
Maximum Power Voltage (Vmp)	24.4V
Maximum Power Current (Imp)	8.20A
Open Circuit Voltage (Voc)	30.4V
Short Circuit Current (Isc)	8.77A
Nominal Operating Cell Temperature(NOCT)	45+/-2C
Maximum System Voltage	1000VDC
Maximum Series Fuse	15A
Fire Safety Class	Class C
Weight	12KG
Dimensions	1342 x 992 x 40 mm
Module Application	Class A

Quality Guaranteed
 12 Year Workmanship Warranty
 25 Year Output Performance Warranty
 >90% Output for 12 Years
 >80% Output for 25 Years

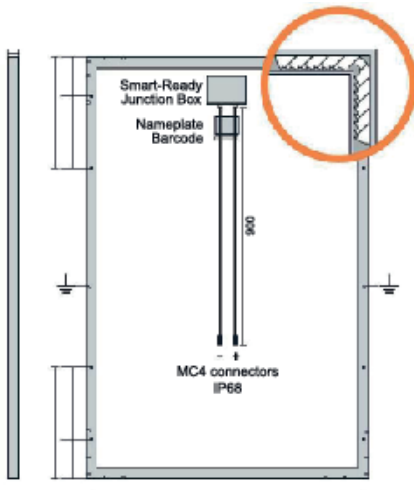

Rear frame mounting-hole positions
 Mounting-hole size: Ø9*14
 All measurements in mm.

- Extremely reliable screwless, interconnected frame for long-term flexibility and strength.
- 8 mounting holes for direct mounting option.
- 20 in-built drainage waterspouts.
- 2 earth (ground) points.
- Tempered ARC (anti-reflective) front glass.



Power Tolerance	-0/+3%
Working Temperature	-40°C to 85°C
Max. System Voltage	1000VDC
Wind Rating	5400Pa
Hail Resistance	40mm @ 80km/h
Max. Fuse Rating	15 Amp
Frame Thickness	40mm
Clamp on Long or Short sides	



- IEC61730 safety rated for high wind pressure, hail impact, snow load and fire.
- Certified against Salt mist corrosion for coastal areas.
- Certified against Ammonia corrosion for agricultural installations.
- Produced in an environmentally friendly ISO 9001, OHSAS 18001 and ISO 14000 certified manufacturing facility.
- Tested to IEC / EN 61215.



Features

Classic all Black Panel

Monocrystalline

Smart-ready Junction Box


Produced in an ISO9001, OHSAS 18001 and ISO14000 certified manufacturing facility

IEC / EN 61215

PERC TECHNOLOGY FOR PURE DAYLIGHT EFFICIENCY

Photonomi Global Group a.r.l.
 Level 33,
 25 Canada Square,
 Canary Wharf,
 London,
 United Kingdom,
 E14 5LQ

web: www.honeworld.com
 email: sales@honeworld.com



PHOTONOMI
 GLOBAL GROUP